


Oslo 140mm Drain Kit Schematic

zuhne

Assembled View | Page 1 of 2

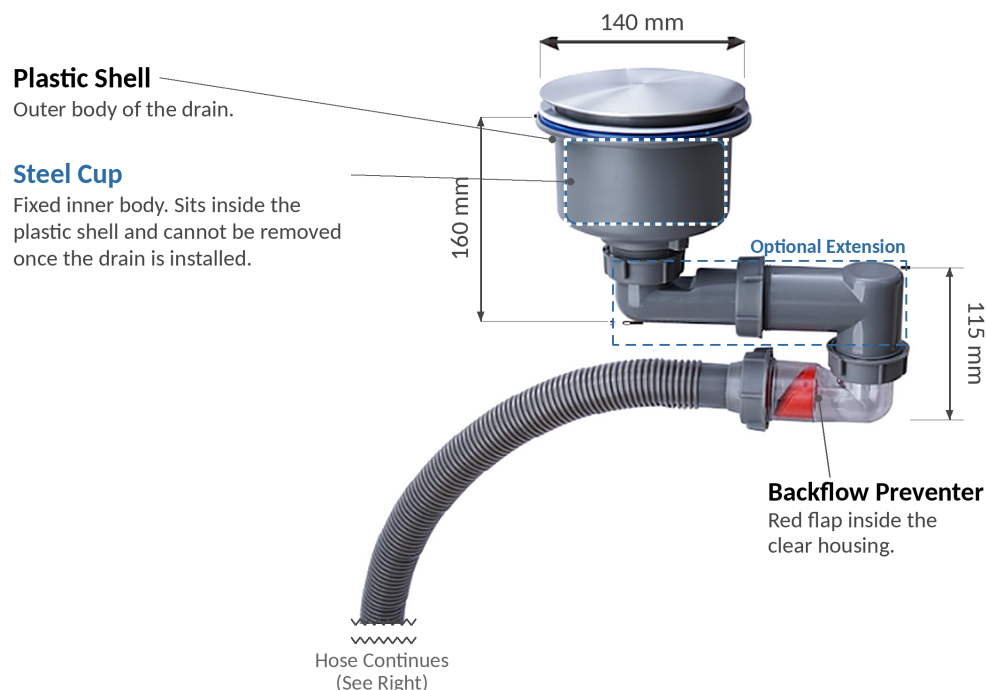

Hose Trimming & Adapter



A Trim Marks

Cut at the lower end of a smooth band, so the whole band stays on the hose. Leave at least 3 cm of smooth hose to push onto the adapter.

B Stepped Adapter

Push-fit. Use the ring that fits snugly. Suits wall and floor outlets and hard PVC piping.

Removable Pieces

Lift these out for cleaning. The steel cup stays in place.

2-Stage Strainer: separates waste



Drain Cover / Plug



Top Strainer



Strainer Basket


Trim the hose at a smooth band if needed, then push the adapter into the outlet.

The Oslo drain can be attached to wall outlets, floor outlets and directly to hard PVC piping.

Oslo 140mm Drain Kit Schematic

zuhnë

Exploded View | Page 2 of 2

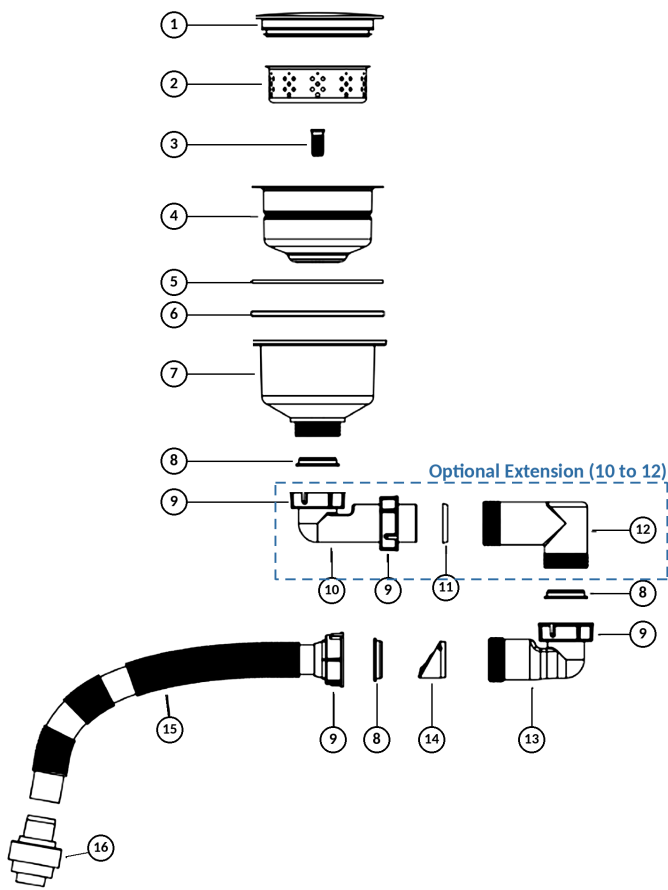

No.	Part	Qty
①	Drain Cover / Plug	1
②	Strainer Basket	1
③	Screw Rod	1
④	Steel Cup	1
⑤	Upper Sealing Ring	1
⑥	Lower Sealing Ring	1
⑦	Plastic Shell	1
⑧	T-Pad (Gasket)	3
⑨	Nut	4
⑩	L-Tube Optional	1
⑪	Cone Pad Optional	1
⑫	Rear Right-Angle Tube Optional	1
⑬	Clear Housing	1
⑭	Backflow Preventer	1
⑮	Drain Hose	1
⑯	Stepped Adapter	1

Parts 10 to 12 are an optional extension. Without them, the Clear Housing (13) connects directly to the Plastic Shell (7) outlet.

The Steel Cup (4) is a fixed inner body inside the Plastic Shell (7). It cannot be removed once the drain is installed.
Also supplied: Top Strainer (loose piece, not shown).
Quantities are for the full kit.

Hand-tighten all plastic nuts. Parts 10 to 12 are an optional extension.